



EAG-GLQ 630W

GROW LIGHTS



EAG-GLQ 630 GROWLIGHT


OPTICAL	Input Power	630W	
	Photosynthetic photon flux	1638 μmols	1512 μmols
	Luminous Efficacy	2.6 $\mu\text{mol/J}$	2.4 $\mu\text{mol/J}$
	Viewing Angle	120°	
	Spectrum	Full Spectrum	
	CRI	>80	
ELECTRICAL	Input Voltage	SOSEN: 120-277VAC 50/60Hz Fahold: 120-347VAC 50/60Hz	
	PF	≥ 0.9	
	THD	$\leq 20\%$	
	Driver Brand	SOSEN OR Fahold	
	Driver Model	SS-320VP-56BH OR FD-150T-054B	
	Driver Surge protection	L/N-PE: 10kV, L-N: 6kV(SS-320VP-56BH) L/N-PE: 6kV, L-N: 4kV(FD-150T-054B)	
	Dimming	0-10V Dimming standard	
MATERIALS	LED Brand	Lumileds+ Seoul	Samsung+OSRAM
	LED Type	SMD 2835 +3535	SMD 301D+3030
	LED QTY	3840+96Pcs	2560+80Pcs
	Housing	Aluminum Alloy	
	Housing Color	Silver	
	Waterproof Rating	WET (IP66)	




EAG-GLQ 630 GROWLIGHT



OTHERS	Operating Temperature	-40°C TO 50°C
	Operating Humidity	10%-90% RH
	Storage Temperature	-40°C TO 80°C
	Storage Humidity	10%-95% RH
	Warranty Time	5 Years warranty with 24/7 operating hours Luminaire lifetime at 25°C

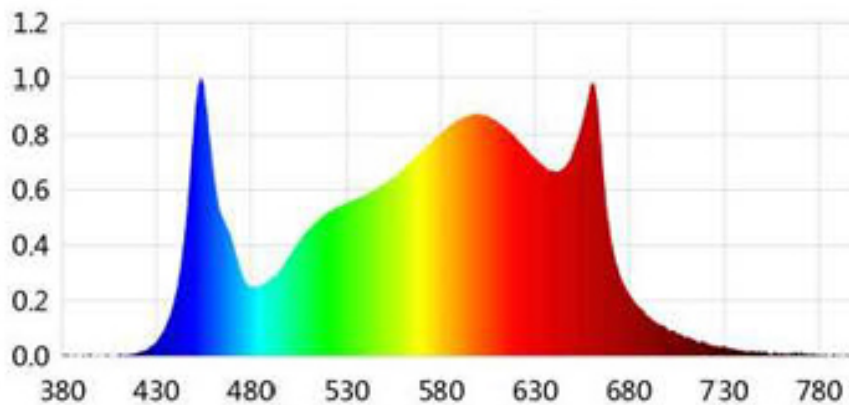

Lumileds+ Seoul

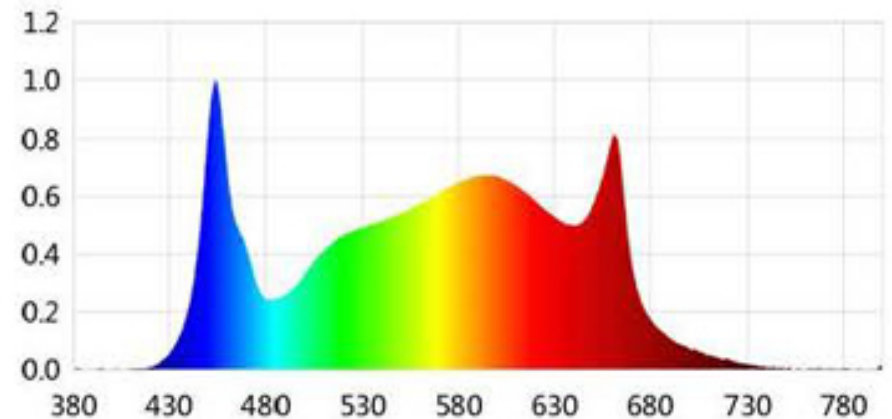

Samsung+OSRAM



BETTER
LIGHTS
FOR A BETTER
WORLD

EAG-LED GLOBAL

13046 Racetrack Rd • Tampa, FL 33626
813.463.2420 • savings@eag-led.com



www.eag-led.com